




Empowering Your Digital Life.

## MH-AAA1950

### Specifications

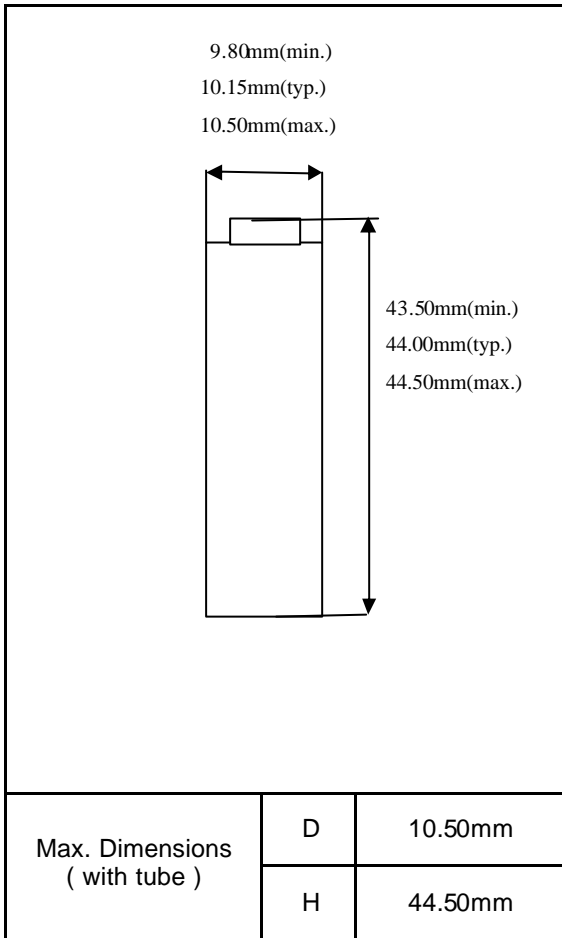

Type : Nickel-Metal Hydride Battery		Size:AAA Consumer Type	
Capacity <sup>1)</sup>	Typical	950mAh	
	Minimum	900mAh	
Nominal Voltage		1.2V	
Charging Current x Time		Fast Charge <sup>2)</sup> 950mAh x 1.1h	
Ambient Temp.	Charge Condition	Fast Charge <sup>2)</sup> 0 ~ 45	
	Discharge Condition		0 ~ 55
	Storage Condition	Less than 30days	0 ~ 55
		Less than 90days	0 ~ 45
Less than 1year		0 ~ 35	
Internal Impedance <sup>3)</sup> ( after discharge to E.V. = 1.0V )		Approx. 38m ( at 1000Hz )	
Weight <sup>4)</sup>		13g	
Size <sup>4)</sup> : ( Diameter ) x ( Height )		10.50(D) x 44.50(H)mm	

1) Single cell capacity under the following condition.

Charge : 95mA x 16h, Discharge : 190mAh (E.V.=1.0V) at 20


2) Use recommended charging system.

3) After a few charge and discharge cycles under the above 1) condition

4) With tube

### Typical Characteristics

#### Charge

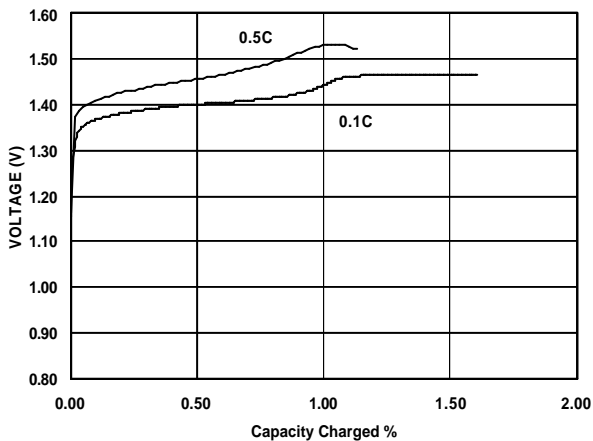

#### Discharge

