




MODEL TLL-5902

International size reference: 1/2AA, ER14252

TECHNICAL DATA



(Typical values @+25 °C for batteries stored for one year or less)

- Nominal capacity @ 1 mA, to 2V 1.1 Ah
 - Rated voltage 3.6 V
 - Maximum recommended continuous current 50 mA
 - Maximum pulse current capability 100 mA
 - Weight 9.6 g (0.339 oz)
 - Volume 4 cc
 - Operating temperature range -55 °C to +85 °C
 - Li metal content approx. 0.35 g
- U.L. Component Recognition, MH 12193

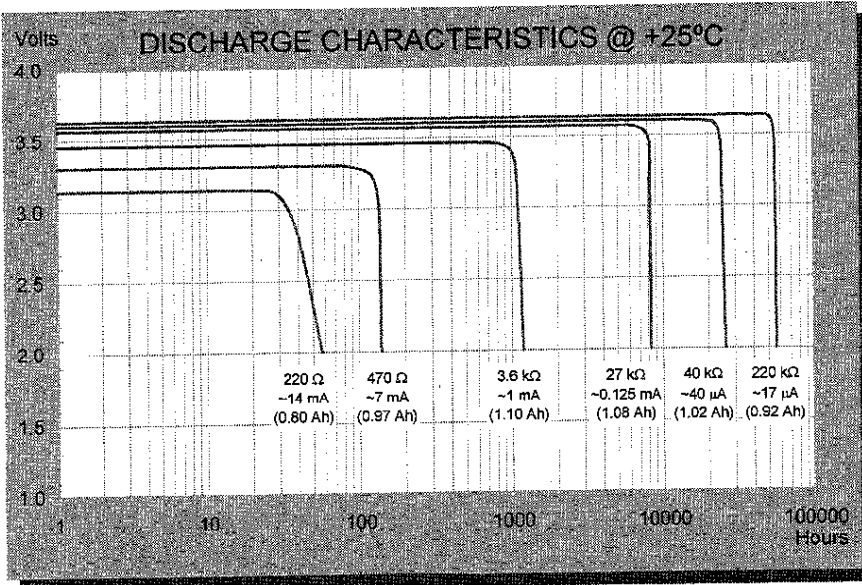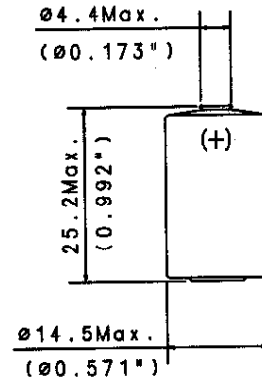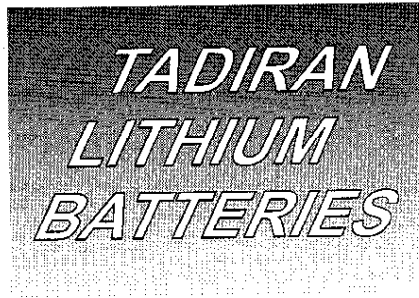

TERMINATIONS & ORDERING NO.

SUFFIX- /S STANDARD	15-5902-21530
SUFFIX- /T SOLDER TABS	15-5902-31530
SUFFIX- /P AXIAL PINS	15-5902-41530
SUFFIX- /PT2 RADIAL PINS	15-5902-36530
SUFFIX- /TP POLARIZED TABS	15-5902-52530
SUFFIX- /PT POLARIZED TABS	15-5902-53530

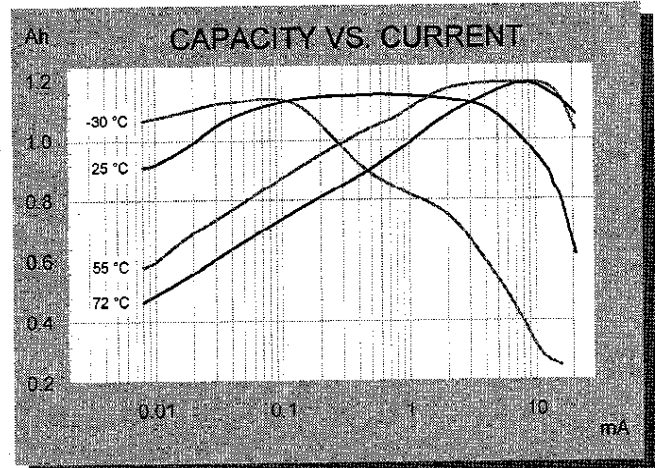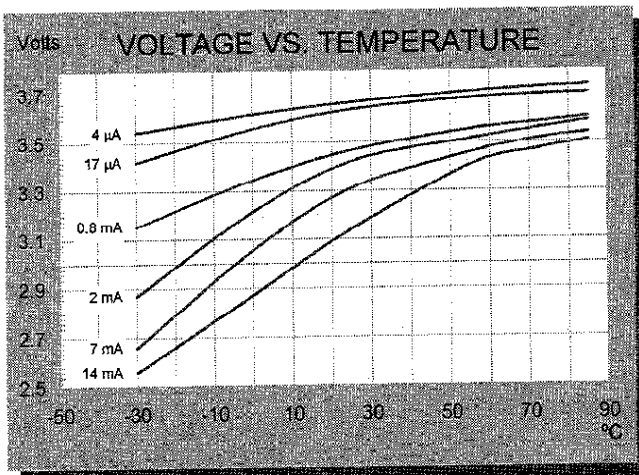

iXtra - Long Term High Performance


Note: Any presentations in this data sheet concerning performance are for information purpose only and are not construed as warranties either expressed or implied, of future performance.

ECN 1501879 Rev. D 11/08

TLL-5902


CELL FEATURES

- 3.6 V Primary lithium-thionyl chloride (Li-SOCl₂)
- Fast voltage recovery after long term storage and/or usage
- High energy density
- High and stable operating voltage
- Low self discharge rate
- Bobbin construction
- Hermetic glass-to-metal-sealing
- Non-flammable electrolyte

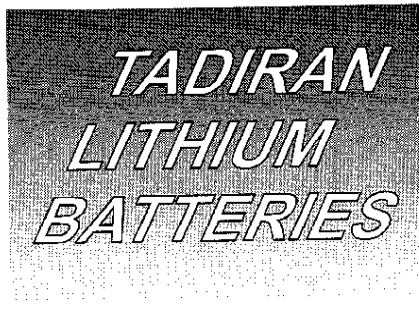

MAIN APPLICATIONS



- Utility meters (elect., water & gas)
- Automatic meter reading
- RF systems
- Sensors & monitoring systems
- Tracking systems
- Wireless security systems
- Automotive electronics
- Industrial electronics
- Ultra Low Power (ULP)

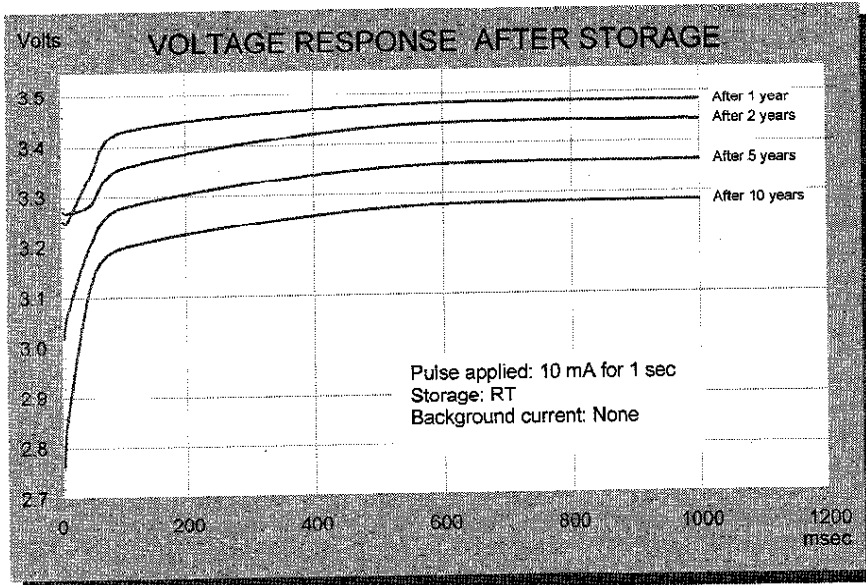

STORAGE CONDITIONS

- Cells should be stored in a clean & dry (less than 30 % RH) area

For updated information please visit our website www.tadiranbat.com

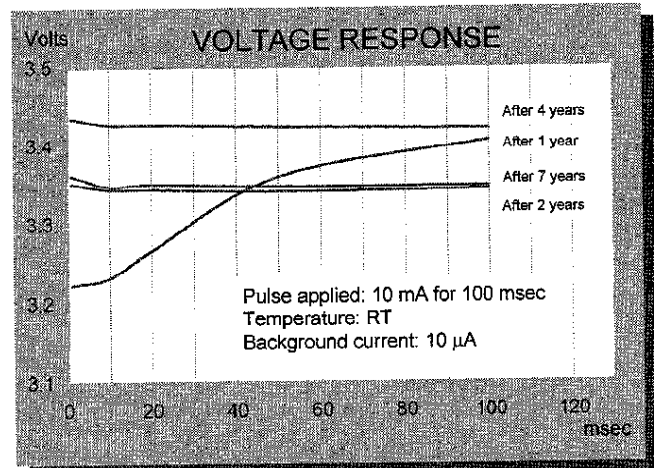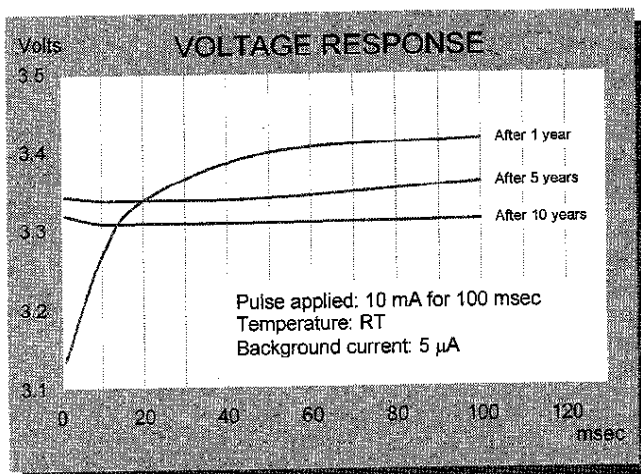

iXtra - Long Term High Performance

Note: Any presentations in this data sheet concerning performance are for information purpose only and are not construed as warranties either expressed or implied, of future performance.

ECN 1501879 Rev. D 11/08